


## 6243Y

PVC Flat Wiring Cable with Bare CPC. BS 6004. 300/500 V

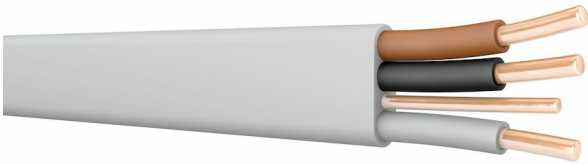

Prysmian 6243Y is a flat PVC insulated and sheathed low voltage wiring cable typically used for small power and lighting applications  
Three cores with bare CPC

### KEY APPLICATIONS

Suitable for fixed installation in industrial, commercial and domestic premises, installation in walls, on boards, in conduit, trunking or embedded in plaster for small power and lighting applications

### FEATURES AND BENEFITS

- Ideal for ring and radial circuits
- Ideal for lighting and switching circuits
- Easy to strip
- Manufactured under ISO 9001 Quality management systems

### STANDARDS



**BS 6004**

**BS EN 60332-1-2**

Construction Standard

Flame Propagation - Single Cable

### CONSTRUCTION

Conductor material	Copper
Conductor surface	Bare
Core insulation material	Polyvinyl chloride (PVC)
Material outer sheath	Polyvinyl chloride (PVC)
Cable shape	Flat

## APPLICATIONS PROPERTIES

Nominal voltage U0 [V]	300
Nominal voltage U [V]	500
Flame retardant	In accordance with BS EN 60332-1-2
Max. conductor temperature [°C]	70
Min. Operation temperature [°C]	-15
Min. Installation temperature [°C]	0
Max. Installation temperature [°C]	60
Bending radius (rule)	4D (Minor axis)

## COLOURS

Insulation:  
Brown, Black, Grey

Sheath:  
Grey

## CURRENT RATINGS

Refer to table 4D5 of BS 7671 Requirements for Electrical Installations. IET Wiring Regulations

## CONTACT INFORMATION

Prysmian Cables & Systems Limited, Chickenhall Lane, Eastleigh, Hampshire, SO50 6YU, United Kingdom  
[uk.prysmiangroup.com](http://uk.prysmiangroup.com)  
[www.whyprysmian.co.uk](http://www.whyprysmian.co.uk)

Copyright Prysmian Group - 2021

You may not reproduce the content, either wholly or in part, of this Datasheet, without the express permission of the copyright owner.

Prysmian Group reserves the right to amend the information within this Datasheet without prior notice. This Datasheet may include inaccuracies, omissions of content and of information. Please verify with the Prysmian UK Technical team, all information contained in this technical datasheet when placing an order.

## TECHNICAL DATA

Number of cores	Nominal cross section conductor [mm <sup>2</sup> ]	Conductor category	Nominal cross section of protective conductor [mm <sup>2</sup> ]	Cable height approx. [mm]	Cable width approx. [mm]	Cable weight [kg/km]	Conductor resistance at 20° C [Ohm/km]
3	1	Class 1 = solid	1	4.5	10.7	78	18.1
3	1.5	Class 1 = solid	1	4.7	11.7	105	12.1